

ECR[®]

Particulate Removal System

Ideal for sub-micron insoluble contamination removal in phosphate ester fluids in turbine EHC systems.

Remove fine particulates that are below the range of mechanical filters. Standard Electrostatic Oil Cleaner (EOC) systems are ineffective for phosphate ester fluid applications due to fluid conductivity restrictions. The ECR[®] is designed specifically to solve this dilemma.



hyprofiltration.com/

*ECR[®] is a registered trademark of EPT CLEAN OIL.




Extend your oil life.

ECR[®] improves fluid color and drastically reduces solid contamination levels. When used in conjunction with ICB[®] for acid and dissolved contamination removal and TMR[®]-N₂ for water removal, comprehensive fluid maintenance is achieved which, when maintained over time, eliminates the need for chemical flushes.

Unique restoration solution.

Pressure induced dieseling and element spark discharge generate sub-micron insoluble carbon based particles that cannot be removed by traditional particulate filtration. The ECR[®] combines a high voltage electrostatic field with a proprietary collector element design to remove the sub-micron particles that are the cause of dark EHC fluid and high varnish potential values (MPC).

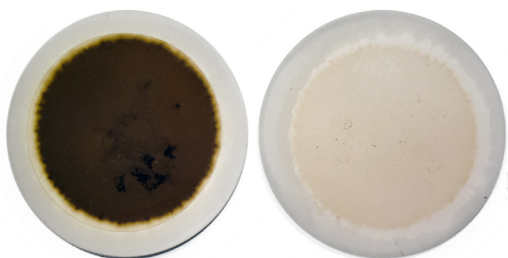

Comprehensive testing & support.

With typical analysis showing as little as 10% of the contamination present, specialized testing is included to document starting contamination levels and demonstrate results.

ECR[®] Specifications

Model	ECR8000
Height	57" (145 cm)
Width	56" (142 cm)
Depth	27" (69 cm)
Weight	567 lbs (257 kg)
Connections	1" MNPT
Max Flow Rate	9 gpm (34 lpm)
Element Quantity	2 collector element
Seals	Fluorocarbon
Control Panel	Weather resistant NEMA 4 enclosure
High Voltage Capacity	12,000 V
Electric Motor	TEFC, 56-145 frame ¾ hp, 1450-1750 RPM
Dirt Capacity	15 lbs (6.8 kg) per element
Element Lifespan	Approximately 4,000 service hours
Max Suction Line Pressure Loss	6 psi (0.41 bar), 12.2 Hg vacuum
Max Water Level	<500 ppm for maximum efficiency
Fluid Compatibility	Phosphate ester based fire resistant fluids.

ECR[®] Part Number Builder

ECR -

Model Element Type Power Option

Model	8000 2 collector elements	
Element Type	Fluid Resistivity Value	Collector Element
	omit > 8G-OHMS/cm	COL-600990
	-LR < 8G-OHMS/cm	COL-600907
Power Options	60 Hz, 1750 RPM	50 Hz, 1450 RPM
	12 120 V ac, 1P	11 110 V ac, 1P
	22 208-230 V ac, 1P	21 220 V ac, 1P
	23 208-230 V ac, 3P	40 380-440 V ac, 3P
	46 460-480 V ac, 3P	52 525 V ac, 3P
	57 575 V ac, 3P	

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.