

VUD

Vac-U-Dry Vacuum Dehydrators

Powered by iCue™ Connected Technology

Engineered to provide efficient water and particulate removal from hydraulic, lubricating, and gear oils, the VUD powered by Donaldson iCue™ Connected Technology combines industry leading fluid filtration and real-time system monitoring to help deliver optimal performance and uptime.

The VUD utilizes a series of sensors to monitor critical performance metrics during operation. This data provides operators and process owners with updates and actionable insights designed to help increase productivity, minimize downtime, and extend the life of valuable equipment.

The skid-mounted vacuum dehydrator is ideal for continuous duty applications that require consistent monitoring. The iCue Technology provides 24/7 access to operational data through any smart device reducing the need for multiple physical equipment checks.



hyprofiltration.com/



Powered by
iCue™ Technology

Contamination is complicated. Removing it is easy.

With features including viscosity specific dispersal element designs, fin tube low watt density heaters, oversized particulate filter, adjustable recirculation line, auto phase detection and reversal, programmable thermostat, proprietary vacuum chamber level control, foam sensor and auto-drain, VUD is the ultimate contamination removal system.



Results you can see.

Clear covers on the vacuum chamber and condensate collection tanks let you see what is really happening inside the VUD. You will know when you start removing water or when you are almost below saturation point with just a glance.

Never stops working.

VUD is a workhorse designed for 24/7 unattended operation. With a dual condensate collection tank design, auto water level sensors and automatic drain valves, there is no need to stop to drain water. The oversized condenser and dual condensate collection tanks work together to keep the water out of the vacuum pump.



Integrated intelligence.

The VUD's control panel makes start-up and shut-down safe and operator-friendly since everything is controlled with the simple push of a button. To take it even further, the optional PLC Touch Screen provides operating controls and data right at your fingertips. When combined with the unit's iCue™ Connected Technology, managing system performance has never been easier.

Filtration starts with the filter(s).

Particulate media options down to $\beta_{3_{Cl}} \geq 4000$ and viscosity specific dispersal elements provide you with the best filtration and water removal capabilities in the world, period.



Completely, entirely, totally, all inclusive.


When it comes to comprehensive filtration and water removal, the buck stops here. VUD customization takes on many forms such as unique size requirements, combining VUD with other technologies such as FRF acid or turbine lube oil varnish removal, all to deliver the perfect oil purification system to meet your exact needs.

The Unmatched Purification Process

How it works

Contaminated oil is drawn into the Vac-U-Dry purifier by a high output vacuum pump. The oil passes through the low watt density heater where heated to optimum temperature for the dehydration process (150°F, 66°C). The oil enters the vacuum chamber passing through specially designed dispersal elements which create a thin film of oil that is exposed to the vacuum. The water is vaporized and then drawn into the condenser where it liquefies and drains into the condensate tank.

The dehydrated oil flows to the bottom of the vacuum chamber and is removed by the discharge pump where it is pumped through the high efficiency particulate filter assembly ($\beta_{x[c]} > 4000$) and returned to the system. The recirculating line helps the Vac-U-Dry reach optimum temperature in cold start situations and can be used to throttle machine inlet and outlet flow. From here, your oil can either be recirculated for additional temperature and contamination control or returned to your reservoir or equipment where it will operate more efficiently than ever.

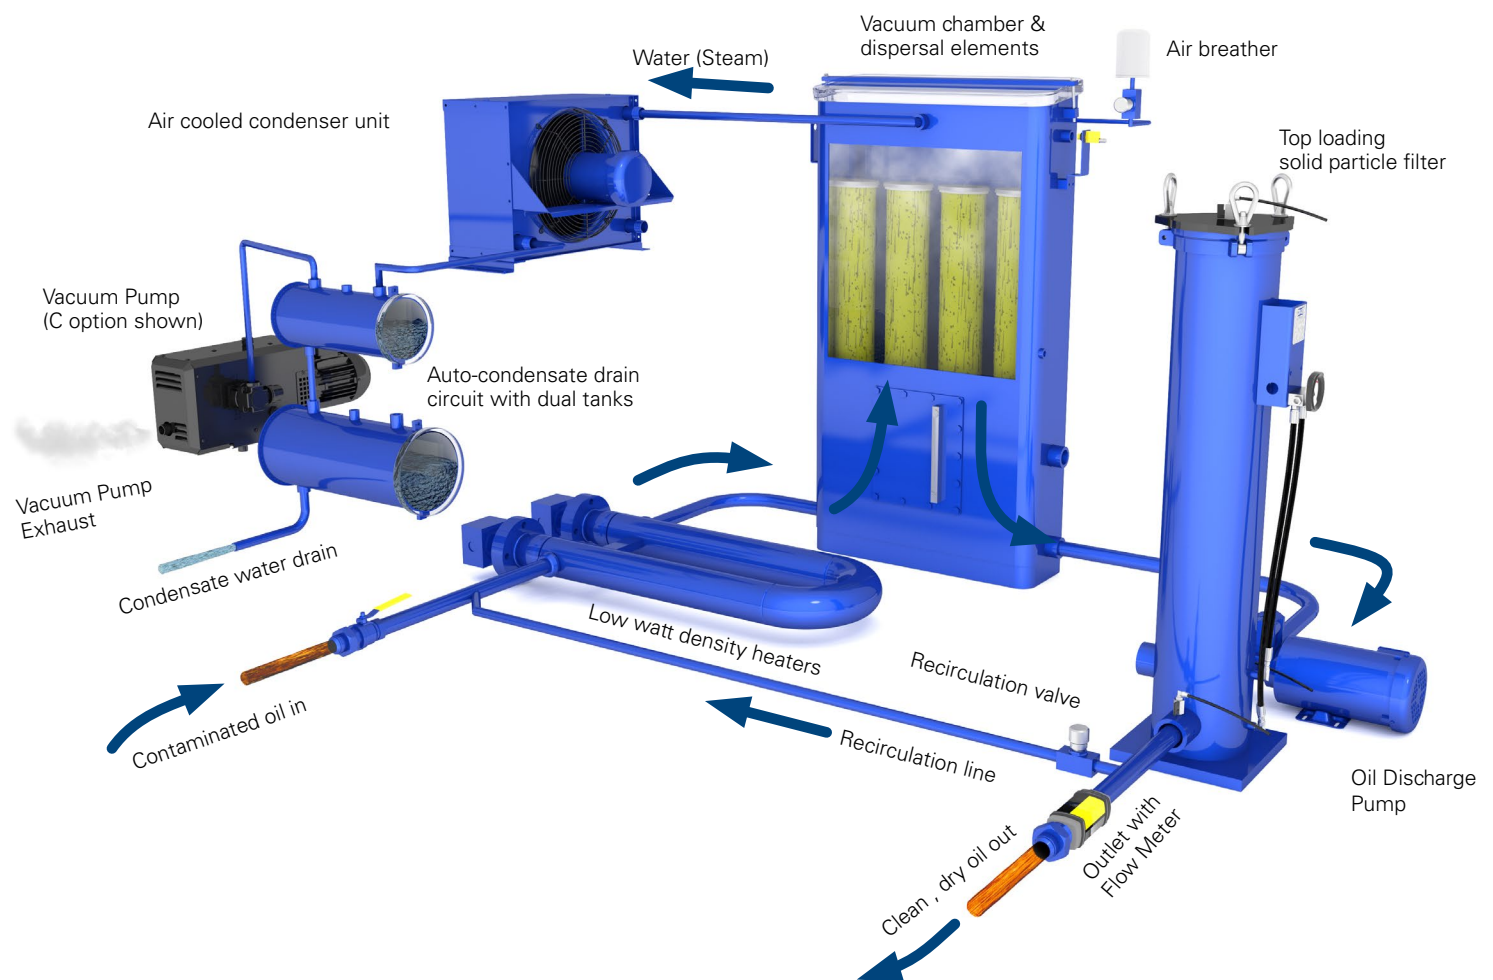


iCue Connected Technology

Optimize the performance of your Vac-U-Dry Vacuum Dehydrator from any smart device with Donaldson Hy-Pro iCue™ Connected Technology.


The iCue Technology utilizes a series of sensors and cloud-based analytics to monitor the operational status of your filtration system. The technology provides real-time visibility into multiple performance metrics to help enable proactive maintenance and management.

The dashboard provides user alerts when key performance parameters are exceeded so potential issues can be addressed quickly.

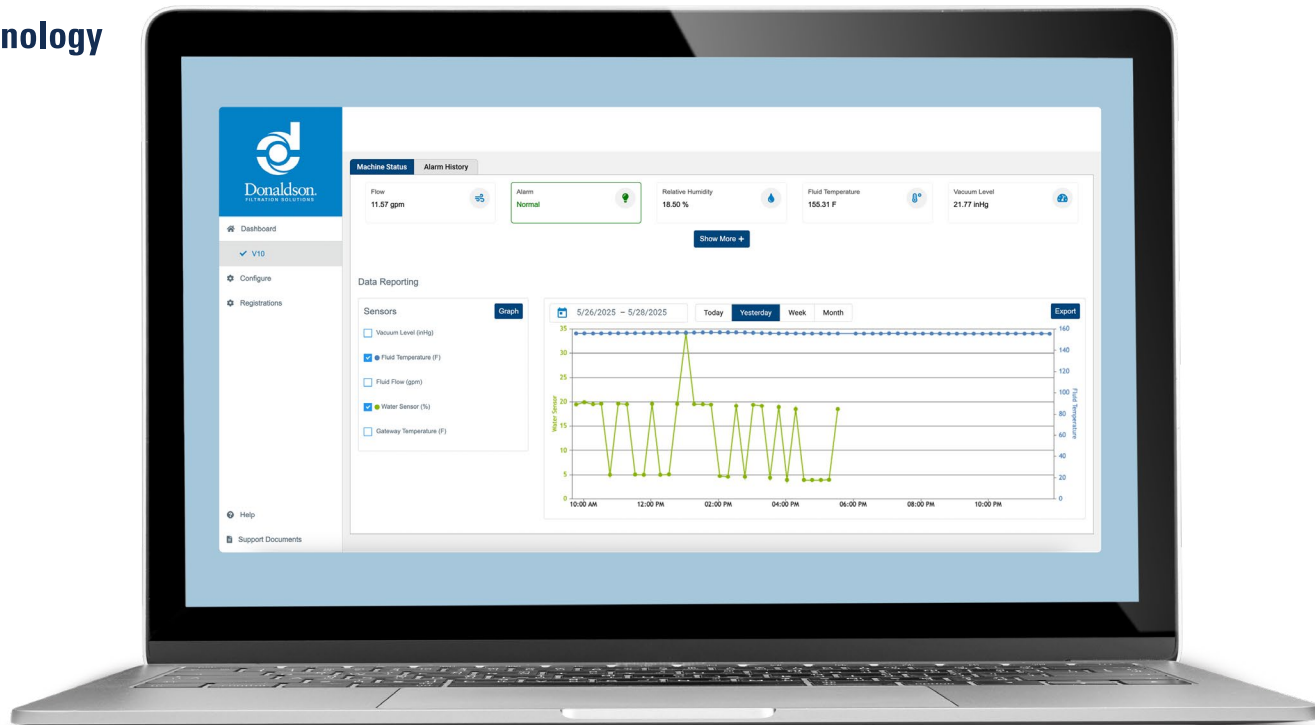

The operational status of your vacuum dehydrator is available through an easy-to-read dashboard on your computer or smart device. The interface provides valuable data that can be used to help make informed decisions about equipment operation, maintenance, and oil quality.

iCue Technology Primary Sensors

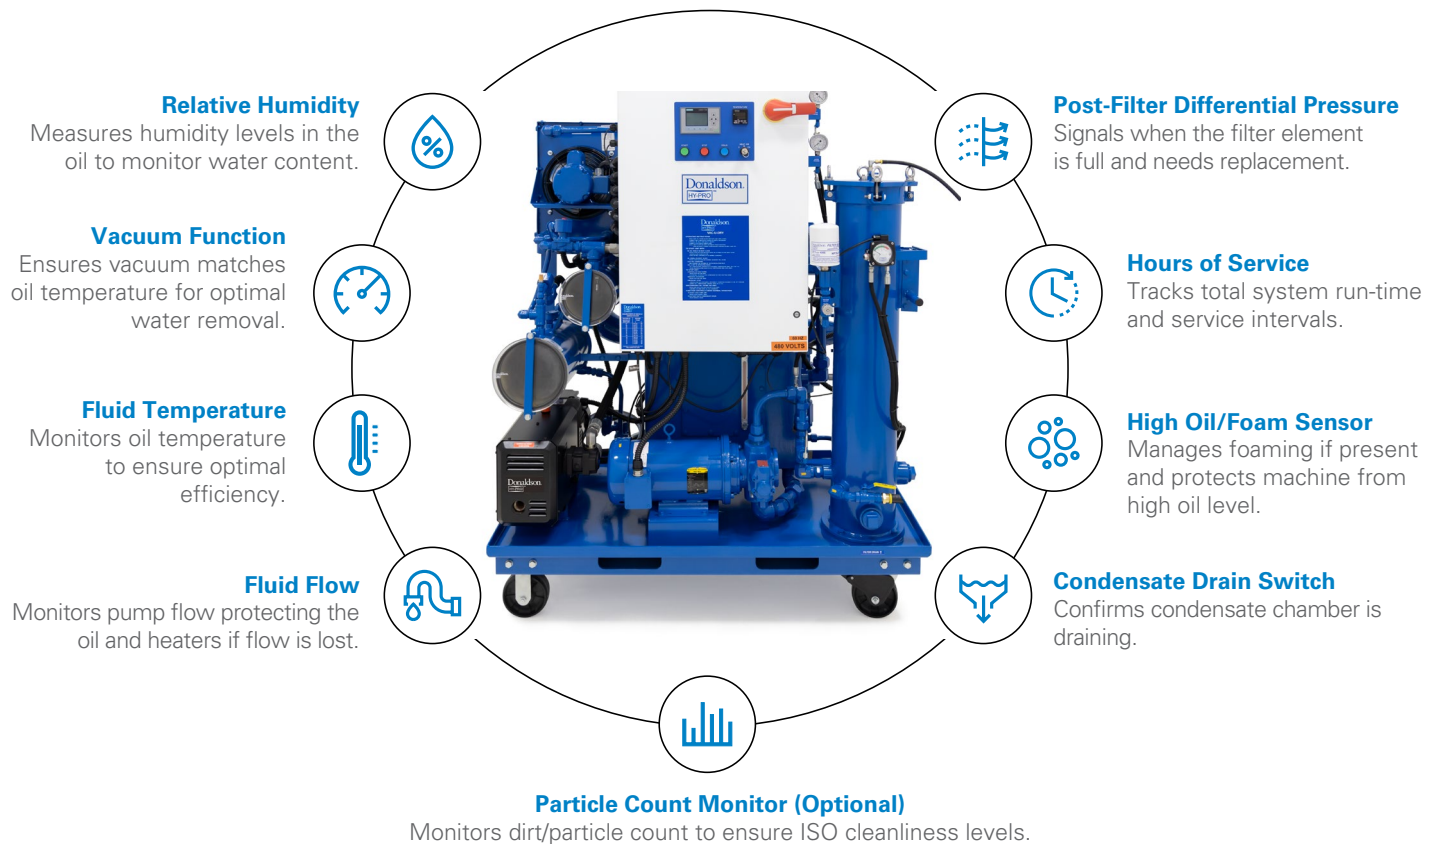

Donaldson Hy-Pro's iCue Technology can help extend equipment life and reduce the need for manual inspections. The system's cloud-based analytics not only alert users when thresholds are breached but also facilitate smarter, faster decisions that keep operations running smoothly.


The technology helps enhance reliability, boost productivity, and supports a maintenance strategy tailored for high-demand, continuous-duty environments.

Engineered to provide efficient water and particulate removal from hydraulic, lubricating, and gear oils, the VUD powered by Donaldson iCue Technology combines industry leading fluid filtration and real-time system monitoring to help deliver optimal performance and uptime.

The VUD utilizes a series of sensors to monitor critical performance metrics during operation. This data provides operators and process owners with updates and actionable insights designed to help increase productivity, minimize downtime, and extend the life of valuable equipment.

The skid-mounted vacuum dehydrator is ideal for continuous duty applications that require consistent monitoring. The iCue Technology provides 24/7 access to operational data through any smart device reducing the need for multiple physical equipment checks.

The Proven Performer

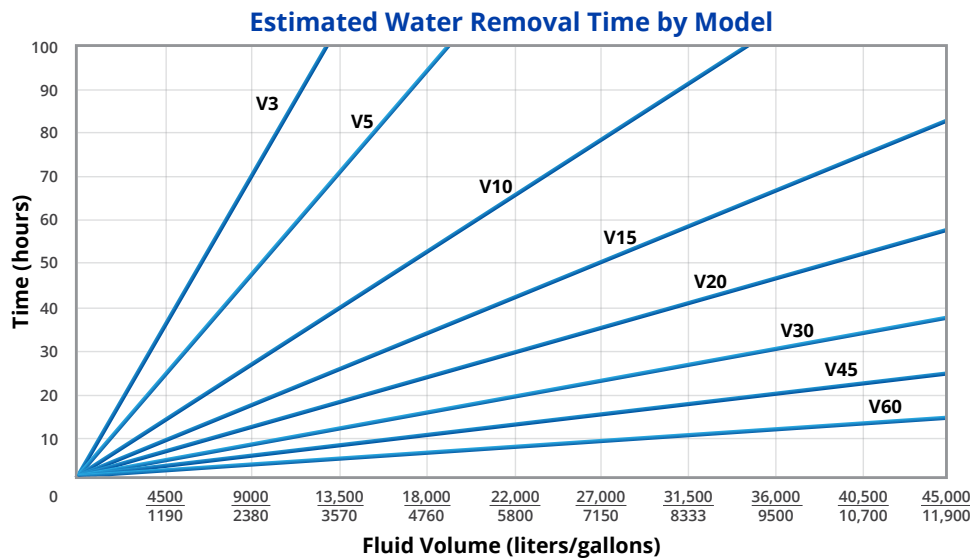

No other technology removes water faster or more safely with less chance of foaming than the Donaldson Hy-Pro VUD. The graph here represents the estimated time required per model to remove water from 5000 ppm (0.5%) down to 150 ppm (0.015%) for increasing reservoir sizes.

Vacuum Pump Options

VUDs come standard with two vacuum pump options to best suit your application needs. Options C and D offer maximum portability to use your VUD in almost any location. Whether you're using your VUD to service multiple systems or for service work, you'll have unmatched filtration everywhere you need it.



C – Dry Seal (Dry Rotary Claw)

Long maintenance interval (5,000 hour synchronizing gear oil change) and great for portability. With excellent corrosion resistance to condensate exposure, this offers our lowest cost of ownership vacuum pump option.




D – Dry Seal (Lubricated Rotary Vane)

500-750 hour maintenance interval (lubricating oil and filter change), excellent for portability, compact size and low weight. The D option vacuum pump offers our lowest initial cost of ownership.

Vacuum power that doesn't suck.

Pulled by the vacuum pump, oil passes through the heater housing and vacuum chamber dispersal elements, providing smooth flow for optimum water removal without foam. The tall vertical vacuum chamber achieves maximum oil film surface area on the dispersal elements, aided by proprietary variable flow level control, to remove water from your oil incredibly fast with unmatched consistency.

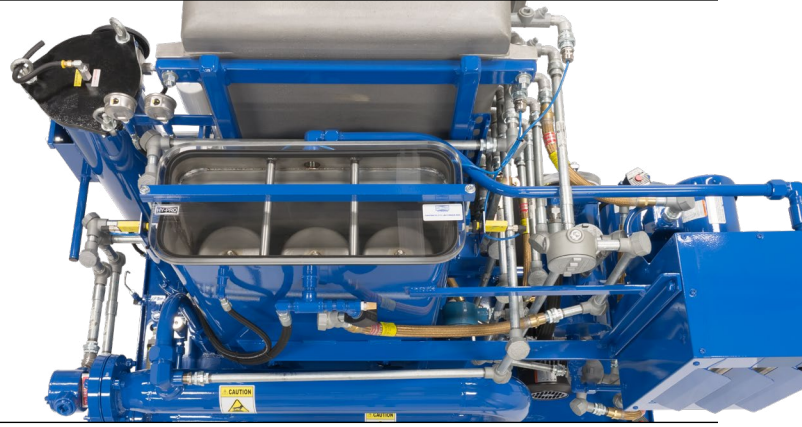


Dispersal elements.

Inside every VUD's vacuum chamber is the secret to its high efficiency water removal success. Viscosity range specific dispersal elements configured properly means faster water removal without the foaming issues that come with a one size fits all dispersal media for hydraulic and lube oils.




Take control of your system, automatically.

The Inlet Control Valve (N/C Solenoid) automatically closes when the VUD is not in operation, preventing the unit from siphoning fluid from a reservoir or flooding from a positive head inlet situation.

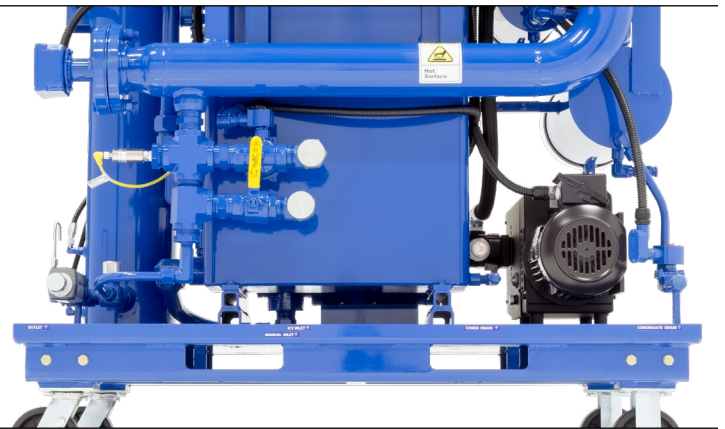


Synced to your system.

Achieve optimum VUD process temperature faster and ease start-up on high viscosity oils, especially when they're cold. Also ideal for adjusting overall VUD return flow down when using VUD on a small reservoir or gearbox. Simple and effective, the recirculation line adds incredible flexibility to fine tune the VUD to your system.

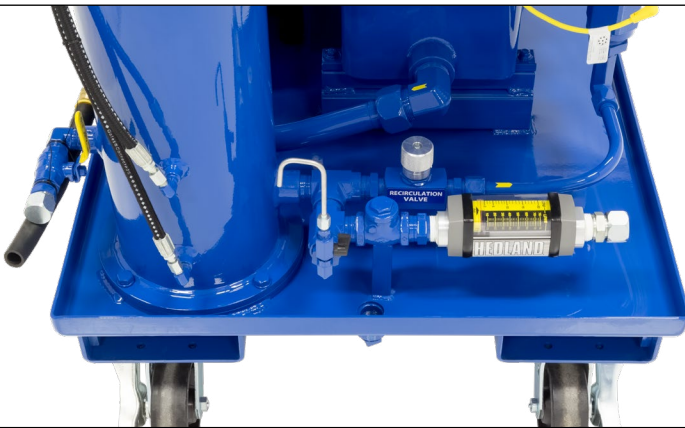

You can't beat the heat.

With no direct contact with the heating element, your turbine oil will safely and quickly get up to temperature without the risk of burning. The programmable temperature control with integral no-flow switch prevents oil damage and allows you to heat your fluids at your own pace. And what's more: all this comes standard on every VUD.

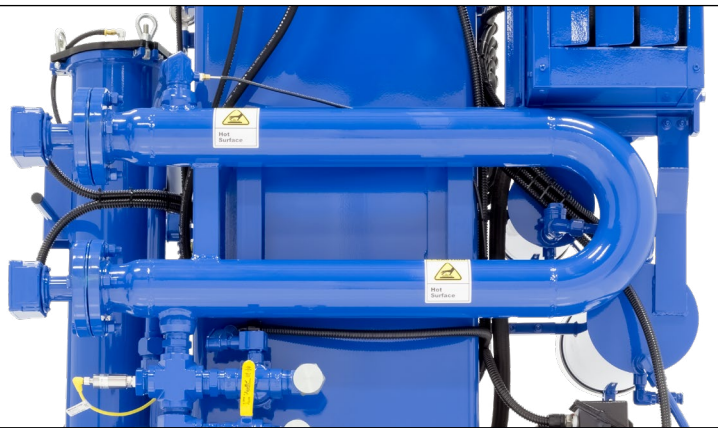

VUD Specifications

Model	V3C	V5C	V10C	V15C	V20C	V30C	V45C	V60C	V100C
Height ¹	60″ (152 cm)	75″ (191 cm)	75″ (191 cm)	75″ (191 cm)	75″ (191 cm)	89″ (226 cm)	75″ (191 cm)	89″ (226 cm)	89″ (226 cm)
Length ¹	56″ (142 cm)	56″ (142 cm)	56″ (142 cm)	56″ (142 cm)	72″ (183 cm)	84″ (213 cm)	84″ (213 cm)	96″ (244 cm)	120″ (305 cm)
Width ¹	32″ (82 cm)	32″ (82 cm)	32″ (82 cm)	32″ (82 cm)	36″ (91 cm)	40″ (102 cm)	48″ (122 cm)	60″ (153 cm)	96″ (244 cm)
Approximate Weight ¹	850 lbs (386 kg)	2000 lbs (908 kg)	2400 lbs (1089 kg)	2500 lbs (1134 kg)	2800 lbs (1270 kg)	3100 lbs (1406 kg)	3400 lbs (1542 kg)	3700 lbs (1678 kg)	4600 lbs (2087 kg)
Dispersal Element Quantity	2 x 11″ (28 cm)	2 x 22″ (56 cm)	3 x 22″ (56 cm)	3 x 22″ (56 cm)	4 x 22″ (56 cm)	4 x 36″ (91 cm)	8 x 22″ (56 cm)	8 x 36″ (91 cm)	12 x 36″ (56 cm)
Operating Temperature	Fluid Temperature 30°F to 180°F (0°C to 82°C)				Ambient Temperature -4°F to 104°F (-20C to 40C)				
Materials of Construction	Frame & Brackets Carbon Steel Heater housing Carbon Steel		Heater element Aluminum Filter assembly Carbon steel		Condensate tanks Stainless steel Chamber/Tank Lid Seals Neoprene Rubber		Element bypass valve Nylon Solenoid valves Brass		
Media Description	M G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x_{ICl}} \geq 4000$			A G8 Dualglass high performance media combined with water removal scrim. $\beta_{x_{ICl}} \geq 4000$			W Stainless steel wire mesh media $\beta_{x_{ICl}} \geq 2$ ($\beta_x \geq 2$)		

¹Dimensions & weights are approximations taken from base model and will vary according to options chosen.

VUD Part Number Builder

VUD - -

Flow Rate Vacuum Pump Power Options Dispersal Element Media Seals Heaters Condenser Special Options Multi Function Unit

Flow Rate ¹	3	3 gpm (11 lpm)	30	30 gpm (114 lpm)
	5	5 gpm (18.9 lpm)	45	45 gpm (170 lpm)
	10	10 gpm (37.9 lpm)	60	60 gpm (225 lpm)
	15	15 gpm (56.8 lpm)	100	100 gpm (379 lpm)
	20	20 gpm (75.7 lpm)		
Vacuum Pump Type	C	Dry seal (rotary claw)		
	D	Dry seal (lubricated rotary vane)		
Power Options	60 Hz		50 Hz	
	23	208-230 V ac, 3P	38	380 V ac, 3P
	46	460-480 V ac, 3P	41	415 V ac, 3P
	57	575 V ac, 3P	52	525 V ac, 3P
Dispersal Element	D	Pleated dispersal element - all synthetic media (viscosity ≤ ISO VG 220)		
	P	Metallic packed dispersal element - not for use in phosphate ester systems (viscosity ≥ ISO VG 460)		
	W	Pleated stainless steel dispersal element (ISO VG 150-320)		
Media Selection	G8 Dualglass		Stainless wire mesh	
	1M	β _{3(C)} ≥ 4000	25W	25μ nominal
	3M	β _{4(C)} ≥ 4000	40W	40μ nominal
	6L	β _{6(C)} ≥ 4000	74W	74μ nominal
	10M	β _{11(C)} ≥ 4000	149W	149μ nominal
	16M	β _{16(C)} ≥ 4000		
	25M	β _{22(C)} ≥ 4000		
Seals	B	Nitrile (Buna)		
	V	Fluorocarbon		
	E²	EPR seals (for Skydrol use)		
Heaters	9	9 kW	56	56 kW (2 x 12 kW) (2 x 16 kW)
	12	12 kW	64	64 kW (4 x 16 kW)
	24	24 kW (2 x 12 kW)	80	80 kW (5 x 16 kW)
	36	36 kW (3 x 12 kW)	96	96 kW (6 x 16 kW)
	48	48 kW (4 x 12 kW)		
Condenser	A	Air cooled		
	B	Air & liquid cooled		
Special Options	L	Liquid cooled		
	3	LFM3 Filter Housing (3 particulate Elements)		
	4	LFM4 Filter Housing (4 Particulate Elements)		
	8	8" solid wheel upgrade		
	A³	Auto condensate drain		
	B	Pre-filter bag filter housing		
	C	CE marked		
	D	Dirty filter indicator alarm light		
	E	Vacuum pump exhaust filter		
	F	Vacuum chamber foaming sensor		
	G	316 stainless condensate wet parts (304 standard)		
	J	Individual heater selector switches		
	K	Sight flow indicator (wheel type)		
	L	Lifting eye kit		
	M	Discharge line flow meter		
	O	On-board PM-1 particle monitor		
	P	PLC touch screen operation & data		
	P9⁶	Phosphate ester fluid compatibility modification		
Multi Function Units	R³	Electrical phase reversal switch		
	S	Inlet line basket strainer		
	S9⁷	Skydrol fluid compatibility modification		
	T⁴	Hose kit (suction & return hoses + wands)		
	U	50' (15 m) electrical cord without plug		
	V⁴	Inlet control valve (for positive head inlet)		
	W	Water sensor and indicator		
	X	Hazardous-location Rated Class 1, Div 2, Grp C/D, Air Purge Panel		
	X1⁸	Explosion Proof Class 1, Div 1, Grp C/D, Class I XP Enclosure		
	X2⁸	Explosion Proof Class 1, Div 2, Grp C/D, Class I XP Enclosure		
	Y	VFD variable speed motor frequency control		
Multi Function Units	omit	Standard VUD capabilities		
	ICBPE⁹	Phosphate ester acid & dissolved metal removal (contact factory for alternate fluids)		

¹Nominal flow rates at 60 Hz motor speeds.

²Contact factory for other fluid option compatibility.

³Standard supplied options, must be included in part number.

⁴Recommended option.

⁵When selected, must be paired with Seal option "V". Contact factory for more information or assistance in fluid compatibility.

⁶When selected, must be paired with Seal option "E". Contact factory for more information or assistance in fluid compatibility.

⁷Consult factory for Cast Aluminum Explosion Proof Panel.

⁸Vanish and ICB add-on technologies condition a portion of maximum VUD flow. Standard vwd flow rate ≤ 5 gpm. ICB add-on will be sized to reservoir volume. V3 uses single element housing (ICB600524)

For all up to date option details and compatibilites, please reference our Contamination Solutions Price List or contact customer service.



Filtration starts with the filter.

Lower ISO Codes: Lower Total Cost of Ownership

Donaldson Hy-Pro filter elements deliver lower operating ISO Codes so you know your fluids are always clean, meaning lower total cost of ownership and reducing element consumption, downtime, repairs, and efficiency losses.

DFE Rated Filter Elements DFE is Donaldson Hy-Pro's proprietary testing process which extends ISO 16889 Multi Pass testing to include real world, dynamic conditions and ensures that our filter elements excel in your most demanding hydraulic and lube applications.

Upgrade Your Filtration Keeping fluids clean results in big reliability gains and upgrading to Donaldson Hy-Pro filter elements is the first step to clean oil and improved efficiency.

Advanced Media Options DFE glass media maintaining efficiency to $\beta_{3_{[c]}} > 4000$, Dualglass + water removal media to remove free and emulsified water, stainless wire mesh for coarse filtration applications, and Dynafuzz stainless fiber media for EHC and aerospace applications.

Delivery in days, not weeks From a massive inventory of ready-to-ship filter elements to flexible manufacturing processes, Donaldson Hy-Pro is equipped for incredibly fast response time to ensure you get your filter elements and protect your uptime.

More than just filtration Purchasing Donaldson Hy-Pro filter elements means you not only get the best filters, you also get the unrivaled support, training, knowledge and expertise of the Donaldson Hy-Pro team working shoulder-to-shoulder with you to eliminate fluid contamination.



Want to find out more? Get in touch.

hyprofiltration.com
info@hyprofiltration.com
+1 317 849 3535

Donaldson Confidential. Do Not Distribute.

© 2026 Donaldson Company, Inc. reserves the right to change or discontinue any model or specification at any time and without notice.
IMPORTANT NOTICE: Many factors beyond the control of Donaldson can affect the use, performance, or results of Donaldson products or services in a particular application, including the conditions impacting how the products or services are selected, used, installed, or maintained. Because these factors are uniquely within the user's knowledge and control, it is essential the user evaluate both the products and any related services to determine their suitability for the user's intended purpose and application, including fitness for the particular purpose. All products, services, product specifications, availability and data are subject to change without notice and may vary by region or country.

Donaldson.
HY-PRO™

F119942-052126-EM